

# Viakon® Aerospace M22759/17 Hook Up Wire

Silver Plated High Strength Copper Alloy Conductor, 600 V

**CME**  
wire and cable

A Viakable Company

## Application

M22759/17 has extruded Ethylene Tetrafluoroethylene (ETFE) insulation for aerospace and other applications requiring medium weight, tight diameter tolerances, and enhanced mechanical strength.

These conductors are used for internal equipment interconnections and to build harnesses for the aerospace industry.

## Features

ETFE insulation is self-extinguishing in both horizontal and vertical flammability tests.

ETFE insulation also provides exceptional resistance to radiation and chemicals.

Excellent thermal and cryogenic stability.

Medium weight.

Superior tensile strength performance.

## Specifications

M22759/17

SAE - AS22759/17

### Voltage Rating:

- 600 volts


### Temperature Rating:

- -55 °C to 150 °C

## Engineering Information

**1. Conductor:** Stranded silver plated high strength copper alloy.

**2. Insulation:** Extruded Ethylene Tetrafluoroethylene (ETFE).

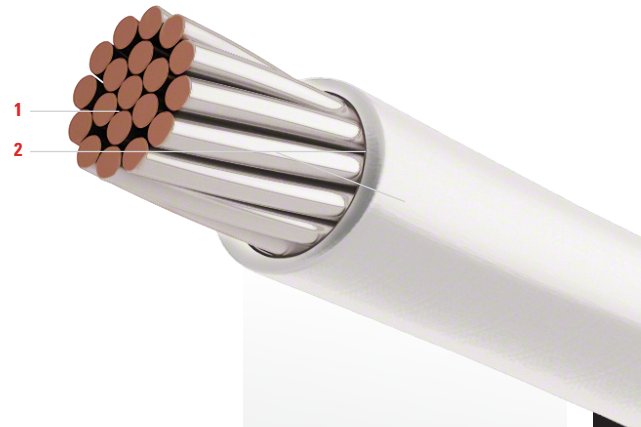

## Technical Data

### MS22759-17 Medium Weight Silver Plated Copper Conductors

Part Number	Size AWG	Number of Strands	Size of Each Strand AWG	Conductor Diameter Minimum mil	Conductor Diameter Maximum mil	Final Product Operation: 600 V, 150 °C		
						Resistance Max @ 20 °C Ω/kft	Nominal O.D. Finished Cable mil	Nominal Weight lb/kft
M22759/17-26-*	26	19	38	18	20	44.8	40	1.76
M22759/17-24-*	24	19	36	23	24	28.4	45	2.43
M22759/17-22-*	22	19	34	29	31	17.5	52	3.50
M22759/17-20-*	20	19	32	37	39	10.7	60	5.14

\*Color identification according to tables I and II (MIL-STD-681). Example: M22759/17-24-9, (9 = White).

## MIL-STD-681 Color Code

Number	0	1	2	3	4	5	6	7	8	9
Color	Black	Brown	Red	Orange	Yellow	Green	Blue	Violet	Gray	White

**This page intentionally left blank**